

FIG. 1

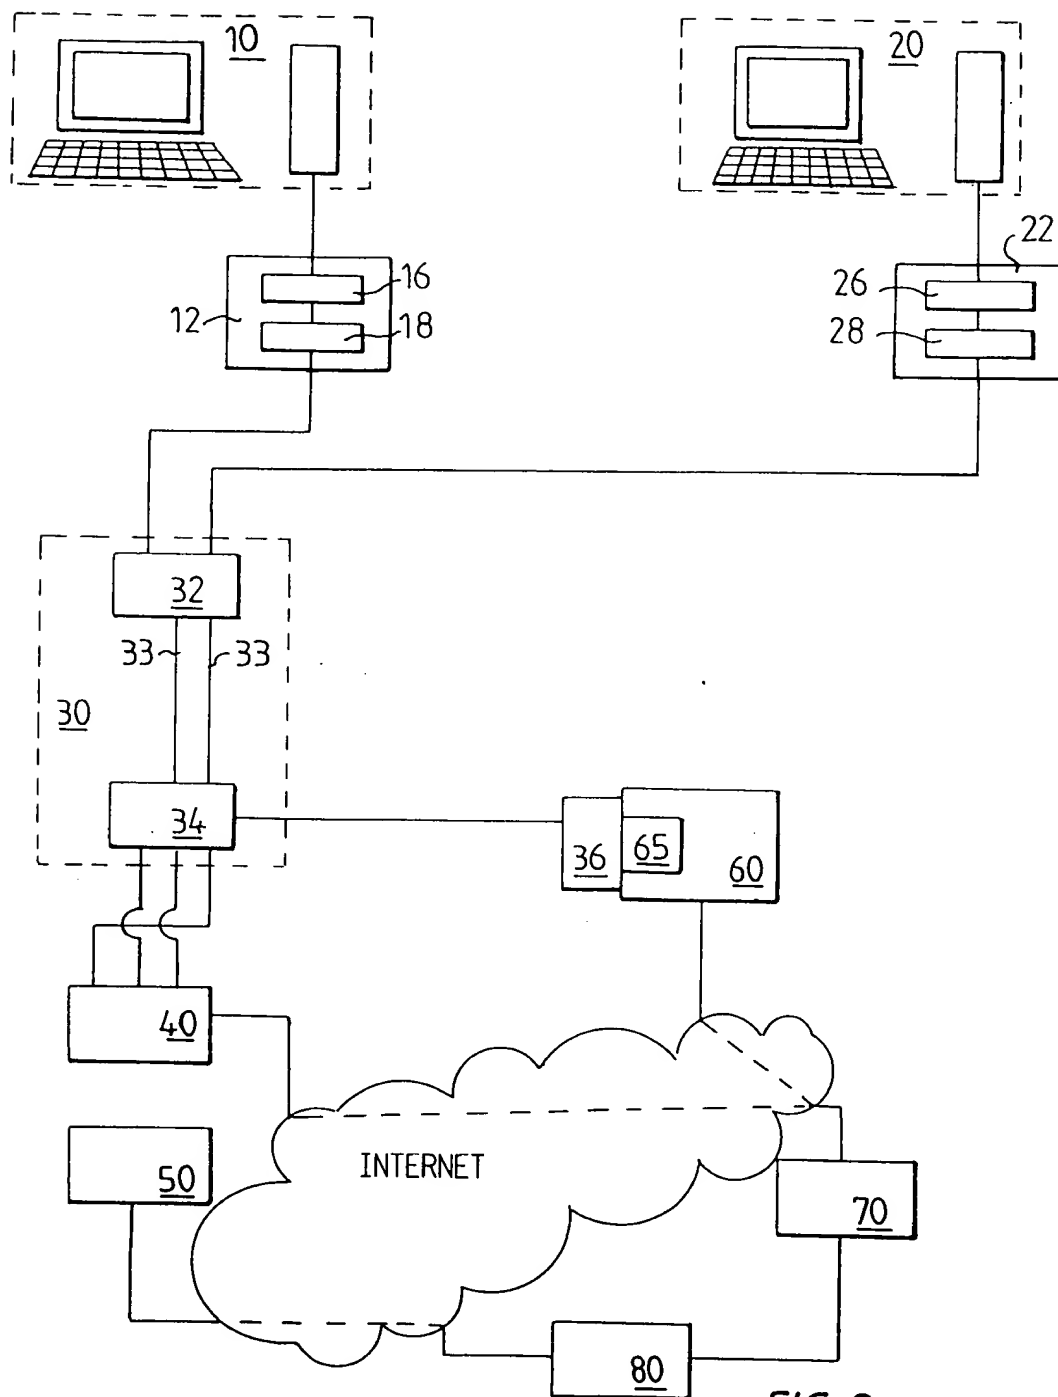


FIG. 2

```

graph TD
    S10([START S10]) --> S20[NT contacts BACS S20]
    S20 --> S30{Is additional user information accessible? S30}
    S30 -- Yes --> S40[Retrieve additional information S40]
    S40 --> S50[Forward information to management system S50]
    S50 --> S60[Add user parameters S60]
    S60 --> S70[BACS contacts MXC via NT S70]
    S30 -- No --> S70
    S70 --> S80{Is any input considered for set-up? S80}
    S80 -- No --> S90[Send error message to communication provider S90]
    S80 -- Yes --> S100{Are xDSL modems available? S100}
    S100 -- No --> S90
    S100 -- Yes --> S110[Activate connection S110]
    S90 --> S70
    S90 --> S110
    S110 --> S120{Is communication established? S120}
    S120 -- No --> S130[Inform xDSL modem of NT S130]
    S130 --> S140[Inform xDSL modem of MXC S140]
    S140 --> S110
    S120 -- Yes --> S150([END S150])
  
```

FIG.3